




Data Sheet Portable flexible tank Alcryn®

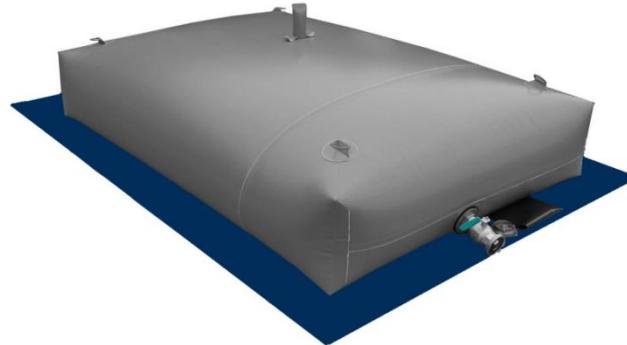

Example with flexible overflow

Manufactured from Alcryn-coated fabric with a minimum tensile strength of 3000 N/5 cm, and a mass of 1300 g per m² of material

Equipped with:

- air vent/overflow, either in the form of a flexible tube or as a screw cap
- 4 pcs. D-Rings on the top side
- Hose coupling (Storz) complete with protective hood. Type, quantity and positioning of couplings to specification.
- Protective wrap-around holdall



Holdall with two carrying loops



Extra: protective ground sheet

Article number	Capacity [l]	Dimensions when filled (LxBxH) [m]	Packed dimensions (LxØ) [cm]	Nett weight w/out coupling [kg]
131001	1.000	1,7 x 1,5 x 0,5	50 x 30	13
131003	2.000	2,4 x 1,8 x 0,5	50 x 35	18
131004	3.000	2,8 x 2,2 x 0,6	60 x 45	22
131005	5.000	3,5 x 2,1 x 0,7	80 x 45	29
131007	10.000	5,5 x 2,7 x 0,8	80 x 60	47
131008	15.000	4,1 x 3,7 x 1,2	100 x 60	53
131010	25.000	5,1 x 4,9 x 1,2	120 x 70	91
131013	50.000	8,2 x 4,7 x 1,4	120 x 75	161

Other sizes and customized versions available on enquiry.