




## Data Sheet Portable flexible tank Alcryn®

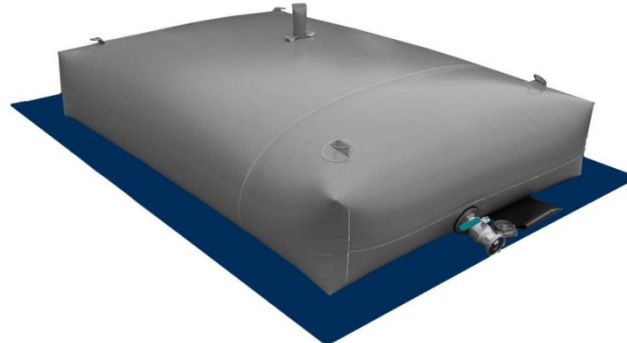

**Example with flexible overflow**

Manufactured from Alcryn-coated fabric with a minimum tensile strength of 2500 N/5 cm, and a mass of 1300 g per m<sup>2</sup> of material

Equipped with:

- air vent/overflow, either in the form of a flexible tube or as a screw cap
- 4 pcs. D-Rings on the top side
- Hose coupling (Storz) complete with protective hood. Type, quantity and positioning of couplings to specification.
- Protective wrap-around holdall



Holdall with two carrying loops



Extra: protective ground sheet

Article number	Capacity [l]	Dimensions when filled (LxBxH) [m]	Packed dimensions (LxØ) [cm]	Nett weight w/out coupling [kg]
<b>131001</b>	1.000	1,7 x 1,5 x 0,5	50 x 30	13
<b>131003</b>	2.000	2,4 x 1,8 x 0,5	50 x 35	18
<b>131004</b>	3.000	2,8 x 2,2 x 0,6	60 x 45	22
<b>131005</b>	5.000	4,0 x 2,5 x 0,7	80 x 45	29
<b>131007</b>	10.000	5,5 x 2,7 x 0,8	80 x 60	47
<b>131008</b>	15.000	4,1 x 3,7 x 1,2	100 x 60	53
<b>131010</b>	25.000	5,1 x 4,9 x 1,2	120 x 70	91
<b>131013</b>	50.000	8,7 x 5,0 x 1,2	120 x 75	161

Other sizes and customized versions available on enquiry.